

## Snap Action Switches

# Technical Information


## Glossary

The following provides information on general terms and other terms used for Switches.

### ■ General Terms

<b>Basic Switch</b>	A small-size switch which has contacts slightly separated and a snap action mechanism. Its contacts are enclosed in a case and operated by externally applying a specific force to an actuator provided on the case.
<b>Contact Form</b>	A configuration of switch contacts to input or output an external signal.
<b>Contact Switch</b>	A type of switch which uses, as opposed to a solid-state switch, mechanical contacts to break or make the external circuit.
<b>Ratings</b>	Various parameters, such as current or voltage values, within which the normal operation of the basic switch is guaranteed.
<b>Molded Terminal</b>	A terminal which is molded with resin after being connected to the internal circuit of the switch with a lead to eliminate exposed current-carrying metal parts and thereby to enhance the drip-proof properties of the switch.

### ■ Terms for Configuration & Structure

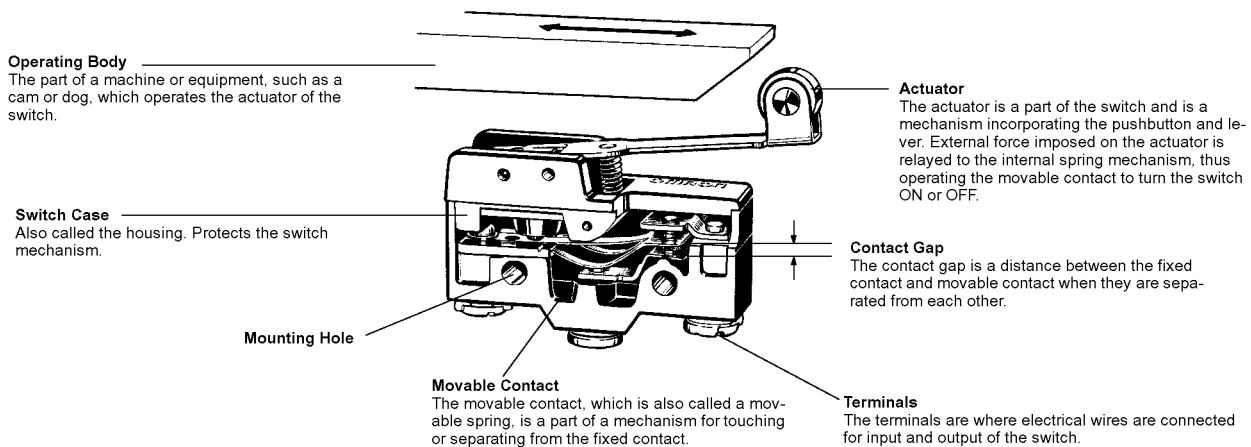

### ■ Terms Related to Life Expectancy

<b>Mechanical Life</b>	The duration in which the normal switching operation is performed without the contacts energized as long as the switch is used with the rated overtravel (OT).
<b>Electrical Life</b>	The duration in which the normal switching operation is performed under the rated load (resistive) as long as the switch is used with the rated overtravel (OT).

### ■ Standard Test Conditions

Switches are tested under the following conditions.

- Ambient temperature: 20±2°C
- Relative humidity: 65±5%
- Atmospheric pressure: 101.3 kPa




### ■ N-level Reference Value

The N-level reference value indicates the failure rate of the switch.

The following formula indicates that the failure rate is 1/2,000,000 at a reliability level of 60% ( $\lambda_{60}$ ).

$$\lambda_{60} = 0.5 \times 10^{-6}/\text{operations}$$


## ■ Contact Shape and Type

Shape	Type	Main Material	Processing Method	Main Application
	Crossbar contact	Gold or silver alloy	Welding or riveting	Crossbar contacts are used for ensuring high contact reliability for switching minute loads. The movable contact and fixed contact come in contact with each other at a right angle. Crossbar contacts are made with materials that are environment-resistant, such as gold alloy. In order to ensure excellent contact reliability, bifurcated crossbar contacts may be used.
	Needle	Silver		Needle contacts are used for ensuring improvement in contact reliability for switching loads, such as relays. A needle contact is made from a rivet contact by reducing the bending radius of the rivet contact to approximately 1 mm for the purpose of improving the contact pressure per unit area.
	Rivet	Silver Silver plated Silver alloy Gold plated		Rivet contacts are used in a wide application range from standard to heavy loads. The fixed rivet contact is usually processed so that it has a groove to eliminate compounds that may be generated as a result of switching. Furthermore, to prevent the oxidation or sulphuration of the silver contacts, the contacts may be gold-plated while the switch is stored. Contacts made with silver alloy are used for switching high current, such as the current supplied to TV sets.

## ■ Contact Gap

The contact gap is either 0.25, 0.5, 1.0, or 1.8 mm. Check the contact gap of the switch to be used if it is necessary to minimize the contact gap. The standard contact gap is 0.5 mm. The smaller the contact gap of a switch mechanism is, the less the movement differential (MD) is and the more sensitivity and longer life the switch has. Such a switch cannot ensure, however, excellent switching performance, vibration resistance, or shock resistance.

The snap-action switch will be less sensitive if the movement differential (MD) increases along with the contact gap due to the wear and tear of the contacts as a result of current switching operations. If the switch with a contact gap of 0.25mm is used, it will be necessary to minimize the switching current in order to prevent the wear and tear of the contacts as a result of current switching operations. A switch with a wide contact gap excels in vibration resistance, shock resistance, and switching performance.

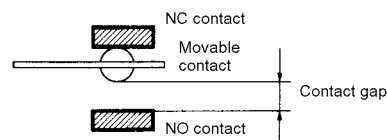

Character displayed	Contact gap	DC switching	MD	Accuracy and life expectancy	Vibration and shock resistance	Feature
H	0.25 mm	Inferior	Minimal	Excellent	Inferior	High precision and long life
G	0.50 mm	Ordinary	Short	Good	Ordinary	General-purpose
F	1.00 mm	Good	Medium	Ordinary	Good	Performance level between G & E
E	1.80 mm	Excellent	Long	Inferior	Excellent	Highly vibration & shock resistive

## ■ Terms Related to Operating Characteristics

Definitions of Operating Characteristics	Classification	Term	Abbreviation	Unit	Dispersion	Definition
	Force	Operating Force	OF	N{gf, kgf}	Max.	The force applied to the actuator required to operate the switch contacts.
		Releasing Force	RF	N{gf, kgf}	Min.	The value to which the force on the actuator must be reduced to allow the contacts to return to the normal position.
		Total Travel Force	TTF	N{gf, kgf}	–	The force required for the actuator to reach the total travel position from the free position.
	Travel	Pretravel	PT	mm or degrees	Max.	The distance or angle through which the actuator moves from the free position to the operating position.
		Overtravel	OT	mm or degrees	Min.	The distance or angle of the actuator movement beyond the operating position.
		Movement Differential	MD	mm or degrees	Max.	The distance or angle from the operating position to the releasing position.
		Total Travel	TT	mm or degrees	–	The sum of the pretravel and total overtravel expressed as a distance or angle.
	Position	Free Position	FP	mm or degrees	Max.	The initial position of the actuator when no external force is applied.
		Operating Position	OP	mm or degrees	±	The position of the actuator at which the contacts snap to the operated contact position.
		Releasing Position	RP	mm or degrees	–	The position of the actuator at which the contacts snap from the operated contact position to their normal position.
		Total Travel Position	TTP	mm or degrees	–	The position of the actuator when it reaches the stopper.

Example of Fluctuation:

V-21-1□6 with max. operating force of 3.92 N {400 gf}

The above means that each switch sample operates with a maximum operating force (OF) of 3.92 N when increasing the OF imposed on the actuator from 0.

## ■ Terminal Symbol and Contact Form

Contact	Terminal symbol
COM	Common terminal
NC	Normally closed terminal
NO	Normally open terminal

## ■ Terminal Types

Type	Shape
Solder terminal	
Quick-connect (#110, 187, and 250)	
Screw terminal	
PCB terminal	
PCB angle terminal	

**Note:** In addition to the above, molded terminals with lead wires and snap-on mounting connectors are available.

## ■ Contact Form

Symbol	Name	Model example
	SPDT	Standard snap-action switch
	SPST-NC	V
	SPST-NO	V
	Split-contact type	Z-10FY-B
	Maintained-contact type	Z-15ER
	DPDT	DZ

**Note:** The above illustrations show typical examples. For the contact form of each product, refer to an individual datasheet.

## ■ Terms Related to EN61058-1 Standards

**Electric Shock Protective Class:** Indicates the electric shock preventive level. The following classes are provided.

- Class 0: Electric shocks are prevented by basic insulation only.
- Class I: Electric shocks are prevented by basic insulation and grounding.
- Class II: Electric shocks are prevented by double insulation or enforced insulation with no grounding required.
- Class III: No countermeasures against electric shocks are required because the electric circuits in use operate in a low-enough voltage range (50 VAC max. or 70 VDC max.)

**Proof Tracking Index (PTI):** Indicates the index of tracking resistance, that is, the maximum dielectric strength with no short-circuiting between two electrodes attached to the switch sample while 50 drops of 0.1% ammonium chloride solution are dropped between the electrodes drop by drop. Five levels are provided. The following table indicates the relationship between these PTI levels and CTI values according to the UL Plastics Recognized Directory.

PTI	CTI Classified by UL
500	PLC level 1: $400 \leq CTI < 600$ (Check with material manufacturer if the material meets CTI 500)
375	PLC level 2: $250 \leq CTI < 400$ (Check with material manufacturer if the material meets CTI 375)
300	PLC level 2: $250 \leq CTI < 400$ (Check with material manufacturer if the material meets CTI 300)
250	PLC level 2: $250 \leq CTI < 400$
175	PLC level 3: $175 \leq CTI < 250$

**Switch Category:** Indicates the heat and fire resistance of the switch on the basis of IEC335-1.

- Category A: The switch has a rated switching capacity of 0.5 A maximum or is used for applications where the switch is kept ON by hand or manually.
- Category C: The switch has a rated switching capacity exceeding 0.5 A or is used for applications where the switch is operated only when the operator is at present.
- Category D: The switch is used for all kinds of applications.

**Number of Operations:** Indicates the operation number of durability test provided by the standard. They are classified into the following levels and the switch must bear the corresponding symbol. A switch with high switching frequency must withstand 50,000 switching operations and that with low switching frequency must withstand 10,000 operations to satisfy IEC standards.

Number of Operations	Symbol
100,000	1E5
50,000	5E4
25,000	25E3
10,000	No symbol required
6,000	6E3
3,000	3E3
1,000	1E3
300	3E2

**Ambient Temperature:** Indicates the operating temperature range of the switch. If the temperature range is not between 0°C and 55°C, the switch must bear the symbol of the temperature range. Refer to the following example.

Symbol	T85	25T85
Temperature range	0°C to 85°C	-25°C to 85°C

**Solder Terminal Type 1:** A type of solder terminal classified by heat resistance under the following test conditions.

**Dip soldering bath applied:** The terminal must not wobble or make any change in insulation distance after the terminal is dipped for a specified depth and period into a dip soldering bath at a temperature of 235°C at specified speed.

**Soldering iron applied:** The terminal must not wobble or make any change in insulation distance after the terminal is soldered by applying wire solder that is 0.8mm in diameter for two to three seconds by using a soldering iron, the tip temperature of which is 350°C.

**Solder Terminal Type 2:** A type of solder terminal classified by heat resistance under the following test conditions.

**Dip soldering bath applied:** The terminal must not wobble or make any change in insulation distance after the terminal is dipped for a specified depth and period into a dip soldering bath at a temperature of 260°C at specified speed.

**Soldering iron applied:** The terminal must not wobble or make any change in insulation distance after the terminal is soldered by applying wire solder that is 0.8 mm in diameter for 5 seconds by using a soldering iron, the tip temperature of which is 350°C.

**Clearance distance:** The minimum space distance between two charged parts or between a charged part and a metal foil stuck to the non-metal switch housing.

**Creepage distance:** The minimum distance on the surface of the insulator between two charged parts or between a charged part and a metal foil stuck to the non-metal switch housing.

**Distance through insulation:** The minimum direct distance between the charged part and a metal foil stuck to the non-metal switch housing through air plus any other insulator thickness including the housing itself.

# Cautions

Do not wire the Switch or touch any terminal of the Switch while power is connected to the Switch, otherwise an electric shock may be received.

## Electrical Conditions


### Load

The switching capacity of the Switch significantly differs depending on whether the Switch is used to break an alternating current or a direct current. Be sure to check both the AC and DC ratings of the Switch by referring to its datasheet. The control capacity will drop drastically if it is a DC load. This is because a DC load, unlike an AC load, has no current zero cross point. Therefore, if an arc is generated, it may continue for a comparatively long time. Furthermore, the current direction is always the same, which results in contact relocation phenomena, and the contacts hold each other with ease and will not separate if the surfaces of the contacts are uneven.

Some types of load have a large difference between usual current and inrush current. Make sure that the inrush current is within the permissible value. The higher the inrush current in the closed circuit is, the more the contact abrasion or shift will be. Consequently, contact weld, contact separation failures, or insulation failures may result. Furthermore, the Switch may break or become damaged.

If the load is inductive, counter-electromotive voltage will be generated. The higher the voltage is, the more the generated energy is, which increase the abrasion of the contacts and contact relocation phenomena. Make sure to use the Switch within the rated conditions.

#### Inrush Current

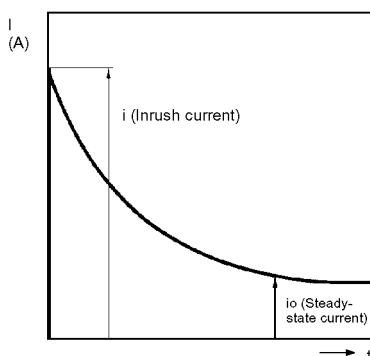


The switching capacity of each Switch appearing on a datasheet is the rated capacity. When applying the Switch to a circuit with a special load with unusual inrush and switching current and voltage waveforms, be sure to test the Switch under the actual conditions before use.

If the load is a minute voltage or current load, use a dedicated Switch for minute loads. The reliability of silver-plated contacts, which are used by standard Switch models, is insufficient in such a case.

If the Switch is used for switching both minute and heavy loads, be sure to connect relays suitable to the loads.

#### Types of Load vs. Inrush Current

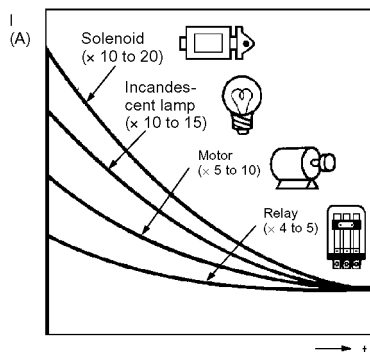

The rated loads of the Switch are as follows:


- Inductive Load: A load having a minimum power factor of 0.4 (AC) or a maximum time constant of 7 ms (DC).
- Lamp Load: A load having an inrush current ten times the steady-state current.
- Motor Load: A load having an inrush current six times the steady-state current.

**Note:** It is important to know the time constant (L/R) of an inductive load in a DC circuit.

## Load Connections

### Example of Power Source Connection (Different Polarity)

The power source may short-circuit in failure mode if the loads are connected in the same way as the "incorrect" circuit below.

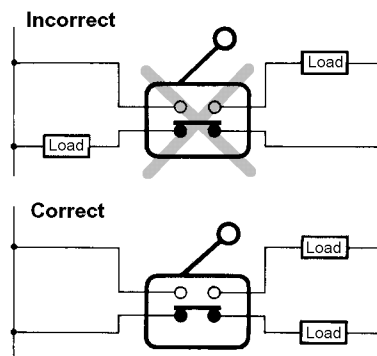


Connect the same polarities to the load.


Even in a "correct" circuit, note that the insulation performance of the switch may deteriorate and the switch life may be shortened because one load is connected to one contact.

### Example of Incorrect Connection of Power Source (Different Current Type)

The DC and AC power may be mixed.

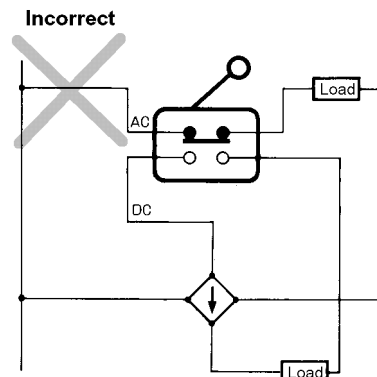

Do not configure a circuit that may place a voltage between the contacts of the Switch; otherwise metal deposition will occur between the contacts.



### Contact Protective Circuit

Apply a contact protective circuit to extend contact life, prevent noise, and suppress the generation of carbide or nitric acid. Be sure to apply the contact protective circuit properly, otherwise an adverse effect may result. The use of the contact protective circuit may delay the response time of the load.

### Life Expectancy

The life of the Switch greatly varies with switching conditions. Before using the Switch, be sure to test the Switch under actual conditions. Make sure that the number of switching operations is within the permissible range. If a deteriorated Switch is used continuously, insulation failures, contact weld, contact failures, Switch damage, or Switch burnout may result.

### Mounting

Before mounting, dismounting, wiring, or inspecting the Switch, be sure to turn OFF the power supply to the Switch, otherwise an electric shock may be received or the Switch may burn.






## Wiring

When mounting the Switch to the mounting panel, keep a sufficient insulation distance between the mounting panel and the Switch. If the insulation distance is insufficient, add an appropriate insulation guard or separator. This is especially important if the Switch is mounted to a metal object.



The Basic Switch does not incorporate a ground terminal. Do not mount the Basic Switch while power is being supplied.

### Typical Examples of Contact Protective Circuit

The following provides typical examples of contact protective circuits. If the Switch is used in an excessively humid place for switching a load that generates arcs with ease, such as an inductive load, the arcs may generate NO<sub>x</sub>, which will change into HNO<sub>3</sub> (nitric acid) if it reacts with moisture. Consequently, the internal metal part may be corroded and result in an operating failure of the Switch. Be sure to select the best contact preventive circuit from the following in order to prevent this.

Circuit example	Applicable current		Feature	Element selection
	AC	DC		
CR circuit 	See note	Yes	<b>Note:</b> When AC is switched, the load impedance must be lower than the CR impedance.	C: 0.5 to 1 μF per switching current (1 A) R: 0.5 to 1 Ω per switching voltage (1 V) The values may change according to the characteristics of the load. The capacitor suppresses the spark discharge of current when the contacts are open. The resistor limits the inrush current when the contacts are closed again. Consider these roles of the capacitor and resistor and determine the ideal capacitance and resistance values from experimentation. Use a capacitor that has low dielectric strength. When AC is switched, make sure that the capacitor has no polarity.
		Yes		
Diode Method 	No	Yes	Energy stored in the coil is changed into current by the diode connected in parallel to the load. Then the current flowing to the coil is consumed and Joule heat is generated by the resistance of the inductive load. The reset time delay in this method is longer than that of the CR method.	The diode must withstand a peak inverse voltage 10 times higher than the circuit voltage and a forward current as high as or higher than the load current.
Diode and Zener diode method 	No	Yes	This method will be effective if the reset time delay caused by the diode method is too long.	Zener voltage for a Zener diode must be about 1.2 times higher than the power source since the load may not work under some circumstances.
Varistor method 	Yes	Yes	This method makes use of constant-voltage characteristic of the varistor so that no high-voltage is imposed on the contacts. This method causes a reset time delay more or less. It is effective to connect varistor in parallel to the load when the supply voltage is 24 to 48 V and in parallel to the contacts when the supply voltage is 100 to 200V.	—

Do not apply contact protective circuits as shown below.

	This circuit effectively suppresses arcs when the contacts are OFF. The capacitance will be charged, however, when the contacts are OFF. Consequently, when the contacts are ON again, short-circuited current from the capacitance may cause contact weld.		This circuit effectively suppresses arcs when the contacts are OFF. When the contacts are ON again, however, charge current flows to the capacitor, which may result in contact weld.
---	---	---	---


## ■ Mechanical Conditions

### Operating Stroke Setting


The setting of the stroke is very important for the Switch to operate with high reliability.

The chart below shows the relationship among operating force, stroke, and contact reliability. To obtain high reliability from the Switch, the Switch actuator must be manipulated within an appropriate range of operating force.

Be sure to pay the utmost attention when mounting the Switch.

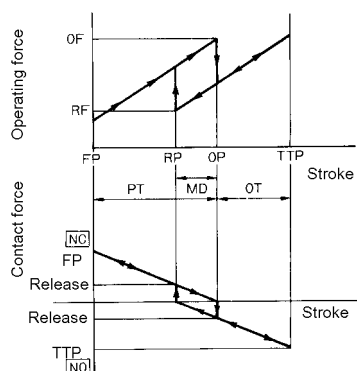


Make sure that operating body returns the actuator to the free position when the operating body has moved if the Switch is used to form a normally closed (NC) circuit. If the Switch is used to form a normally open (NO) circuit, the operating body must move the Switch actuator to a distance of 70% to 100% of the rated overtravel (OT) of the Switch.

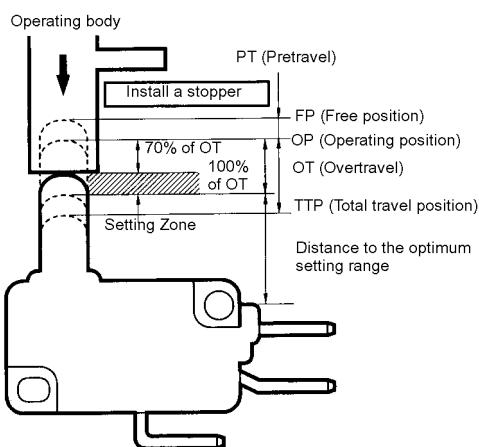

If the stroke is set in the vicinity of the operating position (OP) or at the releasing position (RP), switching operation may become unstable. As a result, the Switch cannot ensure high reliability. Furthermore, the Switch may malfunction due to vibration or shock.

If the stroke is at the total travel position (TTP), the momentary inertia of the operating body may damage the actuator or the Switch itself. Furthermore, the life of the Switch may be shortened.

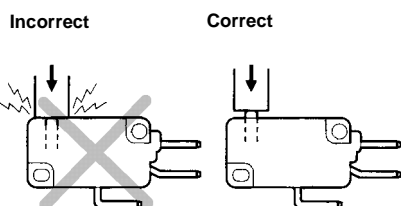

### Switching Speed and Frequency

The switching frequency and speed of a Switch have a great influence on the performance of the Switch. Pay attention to the following.

- If the actuator is operated too slowly, the switching operation may become unstable, causing faulty contact or contact weld.
- If the actuator is operated too quickly, the Switch may be damaged by shock.
- If the switching frequency is too high, the switching of the contacts cannot catch up with the operating speed of the actuator.
- If the operating frequency is extremely low (i.e., once a month or less frequent), a film may be generated on the surface of the contacts, which may cause contact failures.

The permissible switching speed and switching frequency of a Switch indicates the operational reliability of the Switch. The life of the Switch may vary with the switching speed if the Switch is operated within the permissible switching speed and frequency ranges. Test a Switch sample under the actual conditions to ascertain its life expectancy.

### Operating Condition

Do not leave the Switch actuated for a long time, otherwise the parts of the Switch may soon deteriorate and changes in its characteristic performance may result.



# Correct Use

## ■ Electrical Conditions

### Application of Switch to Electronic Circuits

The Basic Switch in switching operation may cause contact bouncing or chattering, thus generating noise or pulse signals that may interfere the operation of electronic circuits or audio equipment. To prevent this, take the following countermeasures.

- Design the circuits so that they include appropriate CR circuits to absorb noise or pulse signals.
- Use Switches incorporating gold-plated contacts for minute loads, which are more resistive to environmental conditions than standard Switches.

### Switches for Minute Loads



Use a dedicated Switch for minute loads, otherwise contact failures may result. Be sure to connect the Switch to a load within the permissible range. Even if the load is within the permissible range, the inrush current of the load may deteriorate the contacts, thus shortening the life of the Switch. Therefore, if necessary, insert the proper contact protective circuit.

## ■ Mechanical Conditions


### Switching Method

The switching method has a great influence on the performance of the Switch. Consider the following before operating the Switch.


- Design the operating body (i.e., the cam or dog) so that it will operate the actuator smoothly. If the actuator snaps backwards quickly or receives damage due to the shape of the operating body, its life expectancy may be shortened.

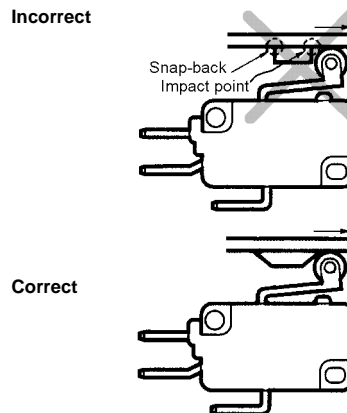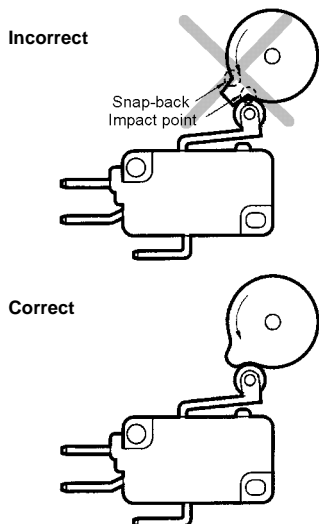


- Make sure that no improper load is imposed on the actuator, otherwise the actuator may incur local abrasion. As a result, the actuator may become damaged or its life expectancy shortened.

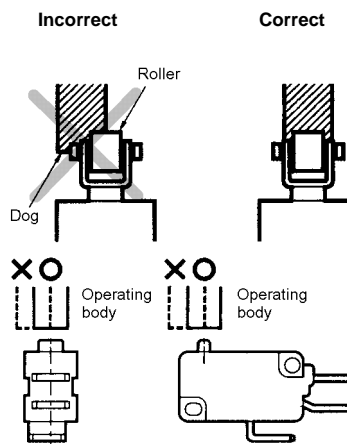

- Make sure that the operating body moves in a direction where the actuator moves. If the actuator is a pin plunger type, make sure that the operating body presses the pin plunger vertically.

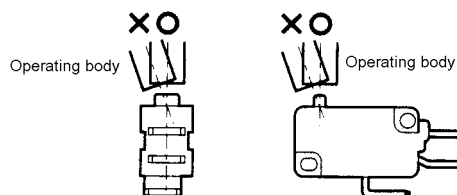

- Operate the actuator of a roller hinge lever or simulated hinge lever type in the direction shown below.

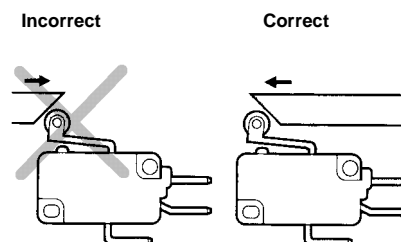

Do not modify the actuator to change the operating position (OP).

- If the lever-type actuator is used as an operating object, check the material and thickness of the lever and make sure that the force imposed on the lever is within the permissible range.


## Mounting

When mounting the Switch, pay attention to the following.

### Securing

When securing the Switch, be sure to use the specified mounting screws with flat washers and springwashers securely.

If the Switch housing is made of thermoplastic, the Switch housing may incur crack damage if it comes into contact with the spring washers directly. In that case make sure that the flat washers come into contact with the Switch housing as shown below.

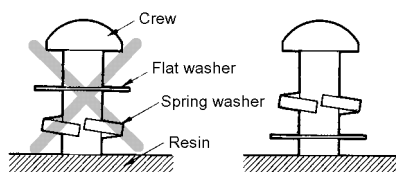


- Do not modify the Switch in any way, for example, by widening the mounting holes

### Locking Agent

If glue or locking agent is applied, make sure that it does not stick to the movable parts or intrude into the interior of the Switch, otherwise the Switch may work improperly or cause contact failure. Some types of glue or locking agent may generate gas that has a bad influence on the Switch. Pay the utmost attention when selecting the glue or locking agent.



### Wiring

Make sure that the lead wires are connected with no inappropriate pulling force and that the wires are supported securely.

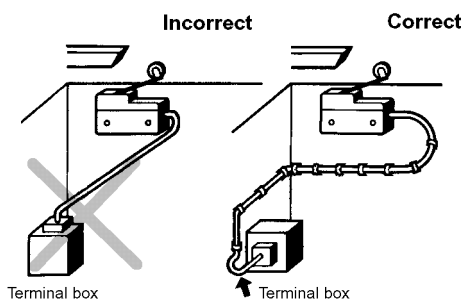


### Mounting Location

Be sure not to mount the Switch in locations where the Switch may be actuated by mistake.




## Maintenance and Inspection

Make sure that the Switch is mounted in locations that allow easy inspection or replacement of the Switch.

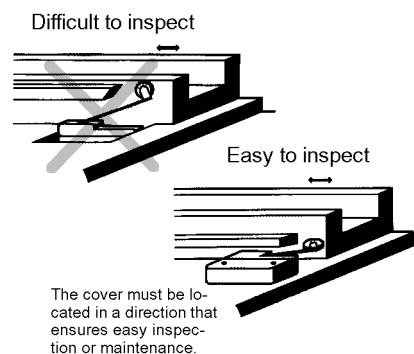

## Mounting Direction

When using a Switch of low operating force attached with a long lever or long rod lever, make sure that the lever is in the downward direction as shown below, otherwise the Switch may not reset properly.



## Terminal Connections

### Solder Terminals

When soldering lead wires to a switch, make sure that the temperature of the iron tip is 380°C maximum. Improper soldering may cause abnormal heat radiation from the switch and the switch may burn.

Complete soldering within 5 seconds at 350°C or within 3 seconds at 380°C. If heat is applied for longer period of time, switch characteristics will be deteriorated, e.g., the case will melt and lead wire insulation will scorch.

Soldering conditions are even more strict for ultra subminiature switches. Refer to the *Precautions* for individual models for details.

### Quick-Connect Terminals

Use the specified receptacles to connect to quick-connect terminals. Do not apply excessive force horizontally or vertically to the terminals, otherwise the terminal may be deformed or the housing may be damaged.

### Wiring Work

When wiring a switch, check the insulation distance between the switch and the mounting plate. If the insulation distance is insufficient, use an insulation guard or separator. Be particularly careful when mounting a switch to metal.


Use wire sizes suitable for the applied voltage and carrying current.

Do not wire a switch while power is being supplied.

### Using Separators


If providing sufficient insulation distance is a problem or there are metal components or copper wire near a switch, use a switch with an insulation guard or use a separator (order separately) to provide sufficient insulation distance.

Separator for SS□




Separator

Separator for V□



Separator


Separator for Z□



Separator

## Soldering Precautions

When soldering by hand, place the terminal horizontal to the ground, use a soldering iron with a suitable heat capacity and a suitable amount of solder, and complete soldering quickly. Prevent flux from entering a switch by exhausting flux gas with an exhaust fan and by avoiding the contact of the tip of the soldering iron and the switch body. Flux gas inside a switch may cause contact failure. Do not apply any force to the terminal or wire immediately after soldering.

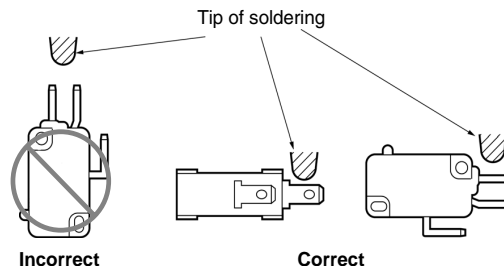


When soldering automatically, adjust the amount of solder so that flux does not float onto the top of PCB. If flux enters the switch, it can cause contact failure.

## Operation and Storage

### Oil and Water Resistance

The standard Switch is not water-resistant. Protect the Switch appropriately when using the Switch in places with water or oil spray.

If the Switch is exposed to water drops, use a sealed Switch.

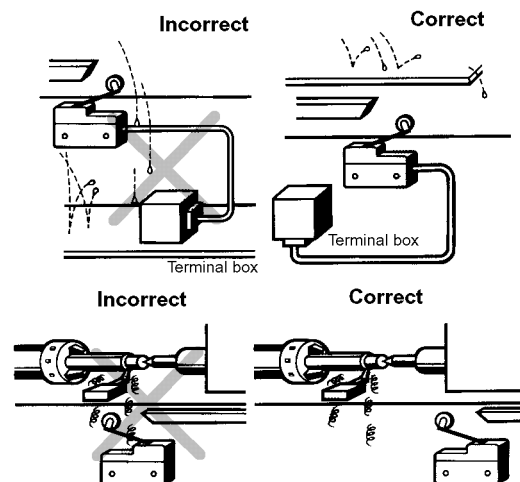

## ■ Others

### Handling

Do not modify the switch in any way, for example, by expanding the mounting holes. Do not drop the Switch, otherwise the Switch may break or deform. Do not apply oil, grease, or other lubricants to the sliding parts of the Switch, otherwise the actuator may not operate smoothly. Furthermore, the intrusion of oil, grease, or other lubricants into the internal part may cause the Switch to fail.


### Operating Environment

Do not install the Switch in any location or direction where the Switch resonates or continuous vibration or shock is imposed on the Switch. If continuous vibration or shock is imposed on the Switch, a contact failure, malfunction, or a decrease in life expectancy may be caused by abrasive powder generated from the internal parts. If excessive vibration or shock is imposed on the Switch, the contacts may malfunction or become damaged.

Do not use the Switch in locations with corrosive gas, such as sulfuric gas ( $\text{H}_2\text{S}$  or  $\text{SO}_2$ ), ammonium gas ( $\text{NH}_3$ ), nitric gas ( $\text{HNO}_3$ ), or chlorine gas ( $\text{Cl}_2$ ), or in locations with high temperature and humidity. Otherwise, contact failure or corrosion damage may result.

If the Switch is used in places with silicone gas, arc energy may attract silicon dioxide ( $\text{SiO}_2$ ) to the contacts and a contact failure may result. If there is silicone oil, silicone sealant, a wire covered with silicone, or any other silicone-based product near the Switch, attach a contact protective circuit to suppress the arcing of the Switch or eliminate the source of silicone gas generation.

Be sure to use the Switch at temperature within the specified range. If the Switch is exposed to radical temperature changes or intense heat, the performance characteristics of the Switch may change.

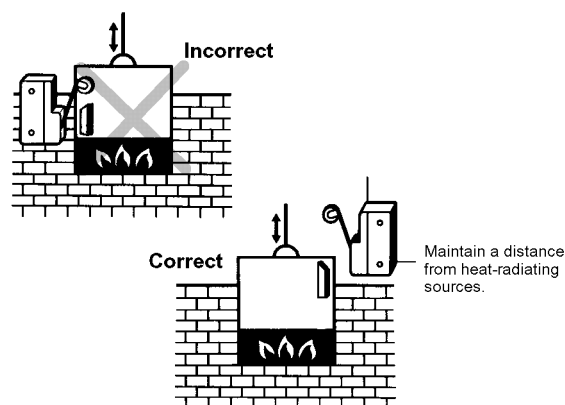

### Storage Environment

When storing the Switch, make sure that the location is free of corrosive gas or dust with no high temperature or humidity. It is recommended that the Switch be inspected before use if it is stored for three months or more.

# Switch Trouble and Remedial Action

Type	Location of failure	Failure	Possible cause	Remedy	
Failures related to electrical characteristics	Contacts	Fault contact	Dust and dirt collect on the contacts	Clean the environment, place the contact Switch in a box, or use a sealed Switch.	
			Oil or water has penetrated into the Switch.		
			Chemical substances have been generated on the contact surfaces because the atmosphere contains chemical gas.	Use a Switch having contacts with high environmental resistivity (such as gold or alloy contacts).	
			Chemical substances have been generated on the contact surface when the Switch breaks a very low load.		
			Solder flux has penetrated into the Switch.	Review the soldering method or use a flux-tight Switch.	
			Malfunction	The contacts are separated from each other by vibration or shock.	Use a Switch having a high contact force (generally a heavy OF).
			Contact weld	The load connected to the Switch is too heavy.	Use a Switch having higher switching capacity or insert a relay to switch heavy load.
			Insulation degradation	Contacts have been melted and scattered by arc.	Insert a contact protection circuit.
		Water has penetrated into the Switch because the Switch is placed in extremely humid environment.		Change the environment, place the Switch in a sealed box, or use a sealed Switch.	
		Oil has penetrated into the Switch and been carbonized by arc heat.			
Failures related to mechanical characteristics	Actuator	Misoperation	The sliding part of the actuator has been damaged because an excessive force was applied on the actuator.	Make sure that no excessive force is applied to the actuator, or use an auxiliary actuator mechanically strong.	
			Dust and dirt have penetrated into the actuator.	Clean the environment or place the Switch in a sealed box.	
			The actuator does not release because the operating body is too heavy.	Use a Switch having a heavier OF.	
			The Switch is loosely installed and thus does not operate even when the actuator is at the rated OP.	Secure the Switch.	
		Service life is too short	The shape of the dog or cam is improper.	Change the design of the dog or cam.	
			The operating method is improper.	Review the OT and operating speed.	
		Damage	A shock has been applied to the actuator.	Change the environment or use a Switch mechanically strong.	
			The clamping part has not been tightened enough or the Switch has been loosely mounted.	Replace the Switch with a new one.	
			Deformation or drop-out.	Relocate the Switch so that improper force will not be imposed on the actuator or in the wrong direction. Review the operating method.	
		Mounting section	Damage	Screws have not been inserted straight.	Check and correct screw insertion methods.
	The mounting screws were tightened with too much torque.			Tighten the screws to an appropriate torque.	
	The mounting pitch is wrong.			Correct the pitch.	
	The Switch is not installed on a flat surface.			Install the Switch on a flat surface.	
	Terminal	Damage	An excessive force was applied to the terminal while being wired.	Do not apply an excessive force.	
			The plastic part has been deformed by solder heat	Use a soldering iron rated at a lower wattage.	

# Terms and Conditions of Sale

1. Offer; Acceptance. These terms and conditions (these "Terms") are deemed part of all quotations, acknowledgments, invoices, purchase orders and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronic Components LLC ("Seller"). Seller hereby objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. Prices; Payment. All prices stated are current, subject to change without notice by Seller. Buyer agrees to pay the price in effect at time of shipment. Payments for Products received are due net 30 days unless otherwise stated in the invoice.
3. Discounts. Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Seller's payment terms and (ii) Buyer has no past due amounts owing to Seller.
4. Currencies. If the prices quoted herein are in a currency other than U.S. dollars, Buyer shall make remittance to Seller at the then current exchange rate most favorable to Seller and which is available on the due date; provided that if remittance is not made when due, Buyer will convert the amount to U.S. dollars at the then current exchange rate most favorable to Seller available during the period between the due date and the date remittance is actually made.
5. Governmental Approvals. Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
6. Taxes. All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Seller or required to be collected directly or indirectly by Seller for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Seller.
7. Financial. If the financial position of Buyer at any time becomes unsatisfactory to Seller, Seller reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Seller may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
8. Cancellation; Etc. Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Seller fully against all costs or expenses arising in connection therewith.
9. Force Majeure. Seller shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
10. Shipping; Delivery. Unless otherwise expressly agreed in writing by Seller:
  1. Shipments shall be by a carrier selected by Seller;
  2. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
  3. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Seller), at which point title to and all risk of loss of the Products shall pass from Seller to Buyer, provided that Seller shall retain a security interest in the Products until the full purchase price is paid by Buyer;
  4. Delivery and shipping dates are estimates only.
  5. Seller will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
11. Claims. Any claim by Buyer against Seller for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Seller within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Seller in the condition claimed.
12. Warranties. (a) Exclusive Warranty. Seller's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Seller (or such other period expressed in writing by Seller). Seller disclaims all other warranties, express or implied. (b) Limitations. SELLER MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Seller further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Seller's sole obligation hereunder shall be to replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product or, at Seller's election, to repay or credit Buyer an amount equal to the purchase price of the Product; provided that in no event shall Seller be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Seller's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Seller before shipment. Seller shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies, or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing are not to be construed as an amendment to the above warranty.
13. Limitation on Liability; Etc. SELLER SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Seller exceed the individual price of the Product on which liability is asserted.
14. Indemnities. Buyer shall indemnify and hold harmless Seller, its affiliates and its employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Seller is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Seller and defend or settle any action brought against Seller to the extent that it is based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
15. Property; Confidentiality. The intellectual property embodied in the Products is the exclusive property of Seller and its affiliates and Buyer shall not attempt to duplicate it in any way without the written permission of Seller. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling supplied by Seller to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
16. Miscellaneous. (a) Waiver. No failure or delay by Seller in exercising any right and no course of dealing between Buyer and Seller shall operate as a waiver of rights by Seller. (b) Assignment. Buyer may not assign its rights hereunder without Seller's written consent. (c) Law. These Terms are governed by Illinois law (without regard to conflict of law principles). Federal and state courts in Illinois shall have exclusive jurisdiction for any dispute hereunder. (d) Amendment. These Terms constitute the entire agreement between Buyer and Seller relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) Severability. If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) Setoff. Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) Definitions. As used herein, "including" means "including without limitation".

## Certain Precautions on Specifications and Use

1. **Suitability for Use.** Seller shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in Buyer's application or use of the Product. At Buyer's request, Seller will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given:
  - (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
  - (ii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
  - (iii) Use in consumer products or any use in significant quantities.
  - (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this product.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Seller shall not be responsible for the user's programming of a programmable product, or any consequence thereof.
3. **Performance Data.** Performance data given in this publication is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Seller's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to Seller's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Seller representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** The information in this publication has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors, or omissions.
6. **RoHS Compliance.** Where indicated, our products currently comply, to the best of our knowledge as of the date of this publication, with the requirements of the European Union's Directive on the Restriction of certain Hazardous Substances ("RoHS"), although the requirements of RoHS do not take effect until July 2006. These requirements may be subject to change. Please consult our website for current information.

Complete "Terms and Conditions of Sale" for product purchase and use are on Omron's website at [www.components.omron.com](http://www.components.omron.com) – under the "About Us" tab, in the Legal Matters section.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

# OMRON®

**OMRON ELECTRONIC  
COMPONENTS LLC**

55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

**OMRON CANADA, INC.**

885 Milner Avenue  
Toronto, Ontario M1B 5V8

**416-286-6465**

**OMRON ON-LINE**

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Canada - <http://www.omron.ca>